

Facies-based full-waveform inversion for anisotropic media: a North Sea case study

Sagar Singh^{1*}, Ilya Tsvankin¹ and Ehsan Zabihi Naeini²

¹Center for Wave Phenomena, Colorado School of Mines, 1500 Illinois St., Golden, CO 80401, USA, and ²Earth Science Analytics, London, UK

Received March 2021, revision accepted July 2021

ABSTRACT

Elastic full-waveform inversion can increase the resolution of reservoir characterization using seismic data. However, full-waveform inversion for realistic anisotropic media suffers from the trade-offs between the medium parameters and strongly relies on the accuracy of the initial model. Here, we employ a regularization methodology that utilizes geologically consistent information to reduce the inversion non-linearity and crosstalk between the parameters. The geologic constraints are obtained from well logs and interpolated along major horizons in the migrated image. The algorithm, designed for transversely isotropic media with a tilted symmetry axis, is applied to ocean-bottom data acquired at Volve field in the North Sea. The facies-based constraints help build high-resolution velocity fields and accurately image the reservoir region. In particular, the developed algorithm increases the resolution of the P- and S-wave symmetry-direction velocities and other parameters at the reservoir level. The facies-based inversion also provides robust estimates of density, which is inverted simultaneously with the velocity fields. Overall, even relatively sparse prior information proves to be sufficient for the proposed methodology to achieve a much higher spatial resolution than the unconstrained full-waveform inversion.

Key words: elastic medium, full-waveform inversion, anisotropy, tilted transverse isotropy, facies-based constraints.

INTRODUCTION

Full-waveform inversion (FWI) has the potential of delivering high-resolution velocity models of complex geologic structures (Tarantola, 1984) and providing accurate estimates of the reservoir properties. However, implementing FWI for realistic elastic anisotropic reservoir models is a computationally challenging task (e.g. Singh *et al.*, 2020a, 2020b). Furthermore, the crosstalk between the parameters of anisotropic media and the insufficient quality of the initial model often hamper the convergence of model updating.

Crosstalk or trade-off occurs when the data residuals caused by an error in one physical property or parameter are attributed to another parameter, impeding the updating procedure and, possibly, leading to geologically inconsistent fea-

tures in the inverted models. Analysing radiation (scattering) patterns of the medium parameters can yield valuable insights into potential trade-offs and the types of input data required for reliable parameter estimation. Such sensitivity analysis is especially valuable for anisotropic media (Alkhalifah and Plessix, 2014; Alkhalifah, 2016; Kamath and Tsvankin, 2016; Kazei and Alkhalifah, 2019; Singh *et al.*, 2021).

Because FWI is a local optimization algorithm, it is sensitive to the choice of an initial model, which needs to be sufficiently close to the actual model. Due to the inherent non-linearity of FWI, the objective function usually contains local minima, which can prevent convergence towards the actual parameters, if the initial model is inaccurate. Inversion for ultra-low frequencies (0–2 Hz) can yield an adequate background model, but such frequencies are seldom acquired in typical seismic surveys.

*E-mail: sagarsingh@mines.edu

Constraining the model-updating procedure by incorporating prior information about the subsurface (e.g. geologic facies) has proven promising in mitigating the problems mentioned above (Guitton *et al.*, 2012; Asnaashari *et al.*, 2013; Singh *et al.*, 2018; Zhang *et al.*, 2018; Singh *et al.*, 2020b). The primary source of this geologic information is available well logs. However, the sparseness of borehole locations makes it difficult to account for realistic lateral heterogeneity. Image-guided interpolation techniques (Zabihi Naeini and Hale, 2015) or machine-learning networks (Zhang and Alkhalifah, 2019; Zhang and Alkhalifah, 2020; Li *et al.*, 2021; Singh *et al.*, 2021) have been proposed to build the spatial distribution of the constraints for laterally heterogeneous media.

Here, we apply to ocean-bottom data (a two-dimensional [2D] line from survey ST0202 acquired at Volve field in the North Sea) a modified version of the FWI algorithm developed by Singh *et al.* (2020b) for VTI (transversely isotropic with a vertical symmetry axis) media. Their FWI methodology includes facies information as a regularization term in the objective function and employs the l^2 -norm for simultaneous multi-parameter inversion. However, here we use a global-correlation-based objective function (Choi and Alkhalifah, 2012), which is more suitable for field-data applications. Objective functions based on cross-correlation are sensitive to the similarity between the synthetic and recorded data. Because this objective function mostly matches the phase in seismic traces, it is less influenced by the amplitude correspondence required by the l^2 -norm. The cross-correlation approach, equivalent to phase inversion in the time domain (Dutta *et al.*, 2014), is particularly useful for field-data applications, where amplitude matching is problematic.

Zhang and Alkhalifah (2020) perform FWI for the same 2D line at Volve field, but they employ data from a different survey (ST10010) and use facies information derived from a convolutional neural network. Also, they assume the medium to be VTI (i.e. they do not take the symmetry-axis tilt into account) and employ a different (hierarchical) parameterization (Jarillo and Tsvankin, 2017).

The results of reflection tomography for this Volve-field line (Wang and Tsvankin, 2013) show that taking the tilt of the symmetry axis into account improves migrated images. Therefore, here we perform FWI for tilted TI media with the axis orientation estimated from the structural dips (Audebert *et al.* (2006)). Also, we employ a velocity-based parameterization, shown to be particularly effective in facies-based FWI (Singh *et al.*, 2018, 2020b).

Each geologic facies considered in the case study occupies a certain horizon identified from a migrated image. The

logs from the available boreholes are assigned to each facies, and the spatial distribution of the elastic properties is built by interpolating the borehole information along the major horizons in the image. The image-guided elastic properties are then calibrated with the facies and borehole data and used as a constraint in the inversion workflow.

In most existing FWI algorithms, density is either assumed to be constant or computed from empirical relationships (e.g. Shipp and Singh, 2002; Brossier *et al.*, 2009; Qu *et al.*, 2017; Zhang and Alkhalifah, 2020). However, density is a crucial physical parameter in reservoir characterization and lithologic interpretation. Also, an accurate density model is beneficial for the velocity inversion (Guitton and Alkhalifah, 2017; Pratt and Smithyman, 2018; Singh *et al.*, 2018, 2020b, 2021). Therefore, here we invert for the 2D density field and update it independently of the other parameters with the corresponding inversion gradient.

We start by discussing the FWI workflow for elastic transversely isotropic media with a tilted symmetry axis (TTI) and the main issues that can cause deterioration in the inversion results. Then we describe the facies-based FWI methodology where the model constraints are obtained from the available well logs and migrated image. The algorithm is applied to the ocean-bottom data from Volve field in the North Sea provided by Statoil (now Equinor). The inversion is carried out for the vertical particle-velocity component with the initial model based on the results of reflection tomography. Comparison with the conventional (unconstrained) FWI demonstrates the ability of the lithologic information to improve the parameter-estimation results, especially in the reservoir region.

FULL-WAVEFORM INVERSION METHODOLOGY FOR TILTED TRANSVERSELY ISOTROPIC MEDIA

Application of full-waveform inversion (FWI) in reservoir characterization requires taking elasticity and anisotropy into account. Here, we implement FWI for elastic TTI media often encountered in the subsurface (Tsvankin and Grechka, 2011; Tsvankin, 2012). Below we discuss the objective function, inversion gradients, and facies-based constraints used in our algorithm.

Objective function

To overcome the difficulties in amplitude matching for field data, we employ the normalized zero-lag cross-correlation

objective function (Choi and Alkhalifah, 2012):

$$E_d(\mathbf{m}) = - \sum_{s=1}^{n_s} \frac{\sum_r \int_0^T \mathbf{d}^{\text{obs}} \mathbf{d}^{\text{sim}}(\mathbf{m}) dt}{\sqrt{\sum_r \int_0^T (\mathbf{d}^{\text{obs}})^2 dt} \sqrt{\sum_r \int_0^T (\mathbf{d}^{\text{sim}}(\mathbf{m}))^2 dt}} \quad (1)$$

$$\equiv - \sum_{s=1}^{n_s} \bar{\mathbf{d}}^{\text{obs}} * \bar{\mathbf{d}}^{\text{sim}}(\mathbf{m}),$$

where $\bar{\mathbf{d}}^{\text{obs}} = \mathbf{d}^{\text{obs}} / \|\mathbf{d}^{\text{obs}}\|$ denotes the normalized observed data, $\bar{\mathbf{d}}^{\text{sim}} = \mathbf{d}^{\text{sim}} / \|\mathbf{d}^{\text{sim}}\|$ is the normalized data simulated for a certain trial model, $*$ is the correlation operator, n_s is the number of sources, r is the trace number and T is total recording time.

The large number of independent parameters makes anisotropic FWI highly non-linear, and the objective function often has multiple local minima. For such multi-modal objective functions, the initial model must lie in the vicinity of the global minimum (i.e. within the basin of convergence).

We simulate the displacement field \mathbf{u} for two-dimensional (2D) heterogeneous TTI media using the elastic wave equation:

$$\rho \partial_t^2 \mathbf{u}_i = \sigma_{i,j} + F_i, \quad (2)$$

where $i, j = 1, 2$, ρ is the density, F_i is the body force per unit volume and $\sigma_{i,j}$ are the spatial derivatives of the stress tensor; summation over repeated indices is implied. According to Hooke's law, the stress tensor can be written as

$$\sigma_{ij} = d_{ijkl} \left[\frac{1}{2} (\mathbf{u}_{k,l} + \mathbf{u}_{l,k}) \right], \quad (3)$$

where d_{ijkl} is the stiffness tensor.

The tensor d_{ijkl} in 2D TTI media has six independent elements and can be related to the stiffness tensor c_{ijkl} in the corresponding VTI medium by the Bond transformation about the horizontal y -axis in a clockwise direction:

$$d_{IJ} = R_y(\theta) c_{IJ} R_y(\theta)^T, \quad (4)$$

where IJ is the two-index (Voigt) notation, θ is the tilt of the symmetry axis away from the vertical and $R(\theta)$ is the rotation matrix (e.g., Oh *et al.*, 2020). Explicit expressions for the nonzero elements of d_{IJ} can be found in Appendix A.

Notation and inversion gradient

The two-dimensional (2D) elastic TTI model is parameterized here by the P- and S-wave velocities in the symmetry-axis direction (V_{P0} and V_{S0}), the P-wave velocity in the isotropy plane $V_{\text{hor},P} = V_{P0} \sqrt{1 + 2\epsilon}$ (which becomes the horizontal velocity if the symmetry axis is vertical) and the velocity $V_{\text{nmo},P} = V_{P0} \sqrt{1 + 2\delta}$ (ϵ and δ are the Thomsen parameters for the cor-

responding VTI model). Note that for a vertical symmetry axis $V_{\text{nmo},P}$ becomes the P-wave normal-moveout velocity from a horizontal reflector. These four parameters, the tilt of the symmetry axis and density control the signatures of the P- and SV-waves in the vertical plane that contains the symmetry axis (Tsvankin, 2012).

Note that density, which plays an essential role in reservoir characterization, is estimated along with the velocities by our FWI algorithm (Singh *et al.*, 2020b). The symmetry axis is assumed to be orthogonal to the interfaces and is computed from the structural dips in the migrated image (Audebert *et al.*, 2006; Wang and Tsvankin, 2013). The relationships between the velocities defined above and the stiffness coefficients d_{ijkl} are listed in Appendix A. The advantages of the velocity-based parameterization for FWI applications are discussed in Kamath and Tsvankin (2016), Singh *et al.* (2020b), and Singh *et al.* (2021).

The gradient of the objective function with respect to the model parameters is computed using the adjoint-state method (e.g. Kamath and Tsvankin, 2016):

$$\frac{\partial E_d(\mathbf{m})}{\partial \mathbf{m}} = - \left[\frac{\partial \mathbf{d}^{\text{sim}}(\mathbf{m})}{\partial \mathbf{m}} * \mathbf{q} \right], \quad (5)$$

where $\mathbf{q} = (1/\|\mathbf{d}^{\text{obs}}\|) [\bar{\mathbf{d}}^{\text{obs}} (\bar{\mathbf{d}}^{\text{obs}} \cdot \bar{\mathbf{d}}^{\text{sim}}(\mathbf{m})) - \bar{\mathbf{d}}^{\text{sim}}(\mathbf{m})]$ is the residual wavefield.

The exact expressions for the FWI gradient can be found in Appendix B. We carry out iterative parameter updating with the non-linear conjugate-gradient algorithm (e.g. Hager and Zhang, 2006).

The wave equation (2) is solved using a forth-order (in space) and second-order (in time) finite-difference algorithm. Because free-surface reflections are removed from the data, we apply the convolutional perfectly matched layers absorbing boundary conditions on all sides of the model (including the top). The direct waves are also absent in the provided field data, so we do not include them in the simulated data set. The wavefield is excited by a point explosive source. The source signal is a bandlimited spike wavelet (to avoid grid dispersion) with a central frequency of 9 Hz. As in Singh *et al.* (2020b), we apply the domain-decomposition method (Bohlen, 2002) to reduce computational cost.

Facies-based constraints for FWI

Following Singh *et al.* (2018, 2020b), Zhang *et al.* (2018), and Zhang and Alkhalifah (2020), the facies-based constraints are

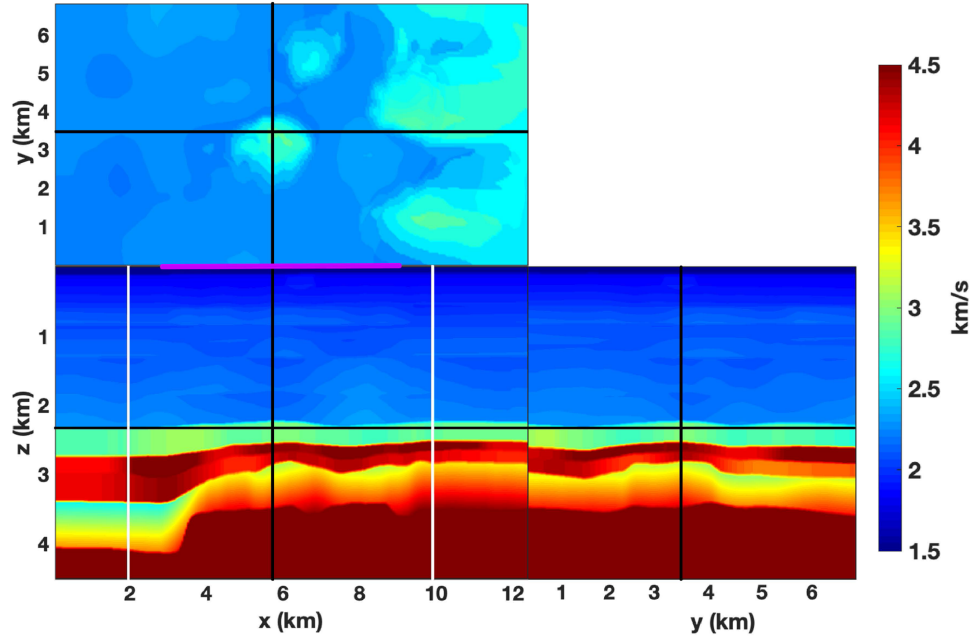


Figure 1 3D tomography model for V_{p0} provided by Equinor. The cross-sections display the parameters in the coordinate planes at the centre of the model. The area between the vertical white lines is used for 2D FWI. The horizontal magenta line on top of the $[x, z]$ -section marks the source locations.

included in the inversion workflow by adding the corresponding term $[E_f(\mathbf{m})]$ to the objective function $E(\mathbf{m})$:

$$E(\mathbf{m}) = E_d(\mathbf{m}) + \beta E_f(\mathbf{m}), \quad (6)$$

where

$$E_f(\mathbf{m}) = \|\mathbf{W}_m(\mathbf{m}^{\text{inv}} - \mathbf{m}^f)\|^2. \quad (7)$$

Here, the vector \mathbf{m}^f represents the facies-based elastic constraints to be obtained from borehole information, \mathbf{m}^{inv} is the inverted model, β is a scaling factor, which determines the relative contribution of prior information, and \mathbf{W}_m is a model-weighting diagonal matrix designed to make the facies-based term dimensionless and to assign larger weights to data around borehole locations (Asnaashari *et al.*, 2013). For field data, the scaling factor (β) should be adjusted depending on the accuracy of the prior model and noise level (e.g. we may assign larger values of β for noisy data and smaller values for clean data).

The first term $[E_d(\mathbf{m})]$ in equation (6) represents the data misfit computed from the zero-lag cross-correlation norm (equation 1), whereas the second one $[E_f(\mathbf{m})]$ is the model misfit, which includes prior facies information. By referring to the output of the unconstrained FWI below, we mean the result of minimizing only the data misfit $E_d(\mathbf{m})$ (i.e. $\beta = 0$).

The gradient of the objective function in equation (6) can be found as follows:

$$\frac{\partial E(\mathbf{m})}{\partial \mathbf{m}} = -\left[\frac{\partial \mathbf{d}^{\text{sim}}}{\partial \mathbf{m}}\right] \mathbf{q} + \beta \mathbf{W}_m^T \mathbf{W}_m (\mathbf{m}^{\text{inv}} - \mathbf{m}^f). \quad (8)$$

APPLICATION TO VOLVE DATA SET

Volve field is a Middle Jurassic oil reservoir located offshore Norway in the southern part of the Viking Graben in the gas/condensate-rich Sleipner area. It is a small dome-shaped structure formed by the collapse of adjacent salt ridges. The system is bounded from the south, east and north by faults mainly produced by salt tectonics.

Acquisition design

The three-dimensional (3D) ocean bottom survey (OBS) (originally conducted in 2002 and reprocessed in 2008) was acquired using inline shooting geometry over a 12.3×6.8 km area of the field (Fig. 1). The sail line is 12 km long with a shot interval of 25 m (50 m between the flips). The data are recorded using a cable (at a depth of about 92 m) containing 240 receivers separated by 25 m.

Equinor (then Statoil) pre-processed the vertical and horizontal particle-velocity components by applying noise

suppression, multiple attenuation and other standard steps described in Szydlík *et al.* (2007). Only the shots with (absolute) offsets less than 5000 m were kept for further processing. A 3D VTI velocity model was built by Equinor using a layer-stripping approach, with each interval updated using a combination of layer-based tomography and migration scanning. The parameter-estimation procedure was constrained by well data, such as compressional and shear sonic logs and check shots. The P- and S-wave vertical velocities V_{P0} and V_{S0} and the anisotropy parameters ϵ and δ in each layer were updated by flattening common-image gathers, minimizing the misties between seismic and well data, co-depting the key horizons on PP and PS migrated sections, and incorporating compressional sonic logs (Szydlík *et al.*, 2007).

Wang and Tsvankin (2013) apply reflection tomography to the vertical particle-velocity component from the two-dimensional line (inline 5089 from the survey) recorded along $y = 2.8$ km (white vertical lines in Fig. 1). Two adjacent source lines ($y = 2.8 \pm 0.025$ km) provided 481 shots with a shot interval of 25 m. Wang and Tsvankin (2013) carry out parameter estimation considering a TTI medium and show their images to be superior to those obtained by Equinor with a VTI model. Here, we apply full-waveform inversion (FWI) to the vertical-component data from the same line and also take the tilt of the symmetry axis into account. The inversion is performed for records from 118 shots placed along the magenta line in Figure 1.

FWI is constrained using borehole data from two deviated wells located near the chosen line (Fig. 2). In addition to sonic (P- and S-waves) and density logs, the provided data also include the well markers (i.e. the depth measurements in the well) for several key horizons (e.g. the top and base of Utsira formation, top of Shetland Group and bottom of Cretaceous layer).

Parameterization and initial model

As discussed above, the medium is parameterized by the P- and S-wave symmetry-direction velocities (V_{P0} and V_{S0}), the P-wave velocity in the isotropy plane ($V_{hor,P}$), the NMO velocity ($V_{nmo,P}$; it becomes the P-wave normal-moveout velocity for a vertical symmetry axis), and density (ρ). The velocity-based parameterization is convenient for full-waveform inversion (FWI) because all parameters have the same units and similar magnitudes (this is also the case for the inversion gradients). Additionally, the spatial distribution of the velocities is often similar, so a single migrated section can be used to implement image-guided interpolation (Singh *et al.*, 2020b, also see below).

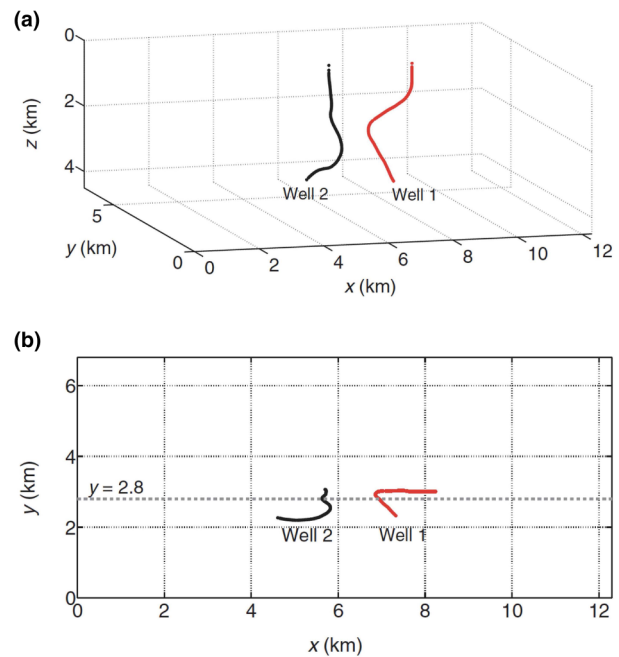


Figure 2 (a) Trajectories of two deviated wells near the line ($y = 2.8$ km, dashed) used in FWI. (b) The well projections onto the horizontal surface. The maximum deviations of the wells from the vertical plane at $y = 2.8$ km are 477 m and 603 m, respectively (adapted from Wang and Tsvankin, 2013).

Following Wang and Tsvankin (2013), the symmetry-axis tilt is estimated by computing the structural dips in the migrated image and setting the symmetry axis orthogonal to the interfaces. Because the tilt on this line is mild (up to $\pm 20^\circ$), we recompute it only after every five inversion iterations.

The source wavelet and recorded data are filtered (2–15 Hz) before the inversion. To improve the convergence of the optimization method, we compensate for the amplitude decay with depth due to geometric spreading and multiple reflections in the overburden. This is achieved by pre-conditioning the FWI gradients using the inverse Hessian matrix obtained by the zero-lag correlation of the magnitude of the forward wavefield with an approximate receiver Green's function (Plessix and Mulder, 2004).

Because the horizontal particle-velocity component is severely contaminated with noise, only the vertical component is included in the inversion. The algorithm is designed to estimate the five pertinent medium parameters (V_{P0} , V_{S0} , $V_{hor,P}$, $V_{nmo,P}$ and ρ) simultaneously using the inversion gradients listed in Appendix B.

The results of three-dimensional tomography and the initial velocity models employed in FWI are shown in Figure 3. The initial models represent one-dimensional smoothed versions of the sections obtained by Equinor. The tomography

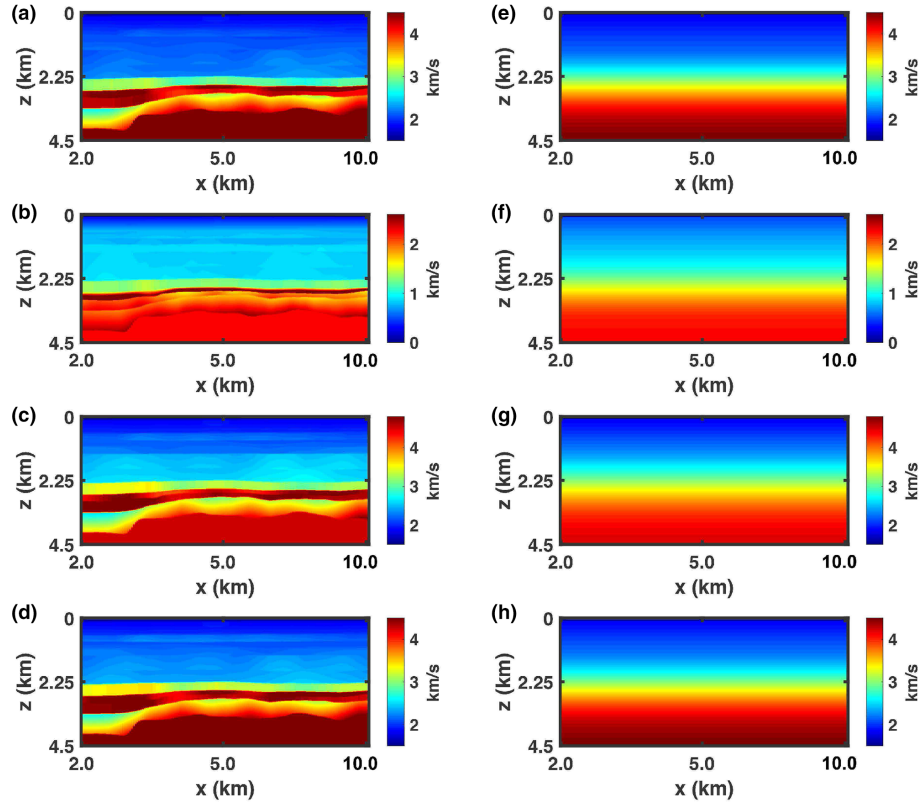


Figure 3 TI parameters along the line extracted from the 3D tomography models provided by Equinor: (a) P-wave vertical velocity V_{P0} , (b) S-wave vertical velocity V_{S0} , (c) P-wave horizontal velocity $V_{hor,P}$, and (d) P-wave NMO velocity $V_{nmo,P}$. The initial parameters for FWI: (e) V_{P0} , (f) V_{S0} , (g) $V_{hor,P}$, and (h) $V_{nmo,P}$.

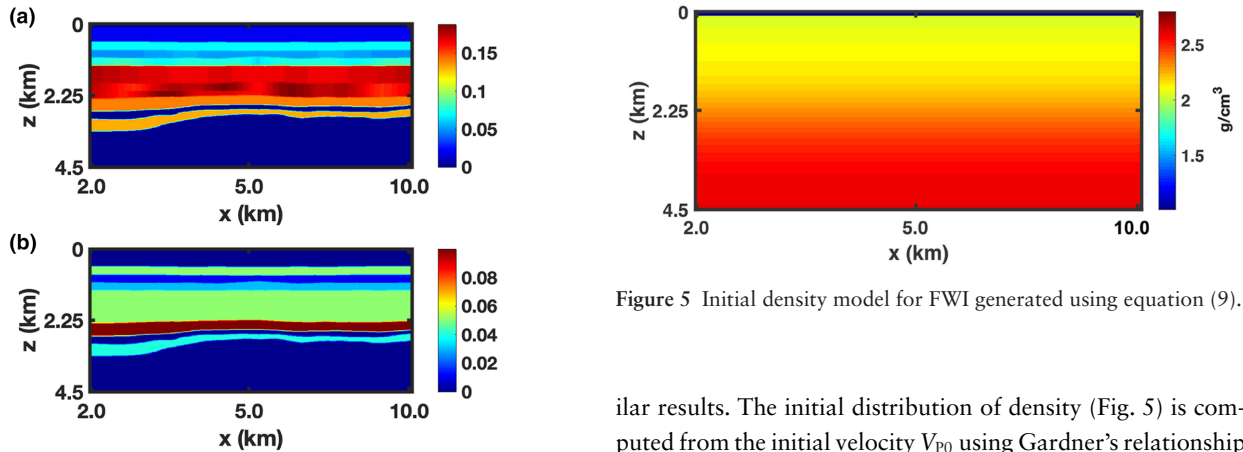


Figure 4 Thomsen parameters from the 3D tomography models: (a) ϵ and (b) δ .

models provided by Equinor in terms of the Thomsen parameters ϵ and δ (Fig. 4) were converted into the velocities $V_{hor,P}$ and $V_{nmo,P}$. Applying the same smoothing to the parameter fields obtained by Wang and Tsvankin (2013) produces sim-

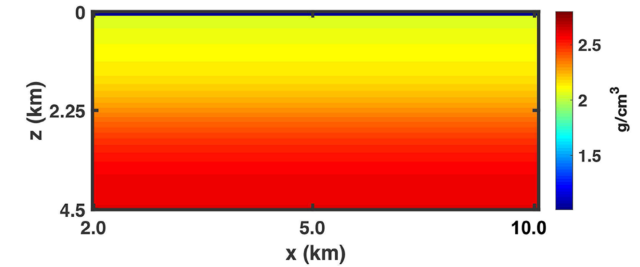


Figure 5 Initial density model for FWI generated using equation (9).

ilar results. The initial distribution of density (Fig. 5) is computed from the initial velocity V_{P0} using Gardner's relationship for shale formations (Martin *et al.*, 2006):

$$\rho = 0.2806V_{P0}^{0.265}, \quad (9)$$

where the input V_{P0} is in m/s. The density in the water is set to 1 g/cm^3 . Note that equation (9) is used only to compute the initial density model, which is updated independently during FWI using the corresponding inversion gradient.

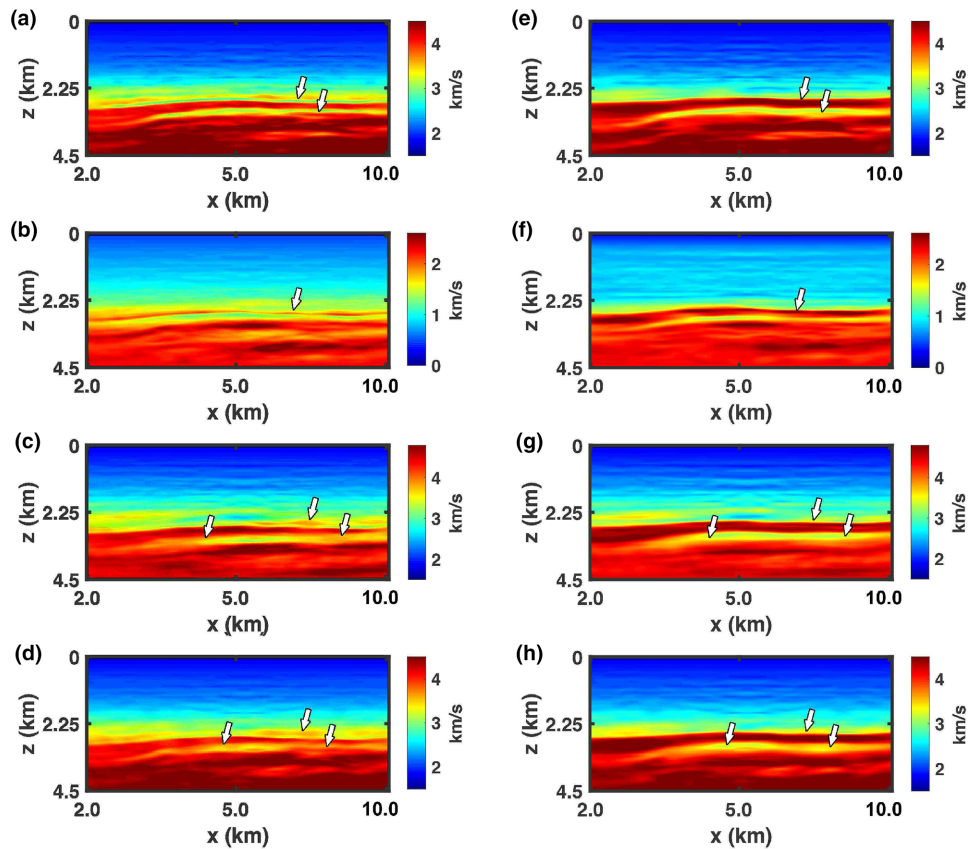


Figure 6 Results of the unconstrained FWI: (a) V_{P0} , (b) V_{S0} , (c) $V_{hor,P}$, and (d) $V_{nmo,P}$. Results of the facies-based FWI: (e) V_{P0} , (f) V_{S0} , (g) $V_{hor,P}$, and (h) $V_{nmo,P}$. The arrows point to the areas of improvement achieved by the facies-based algorithm.

Unconstrained FWI

The output of full-waveform inversion (FWI) without facies-based constraints is shown in Figure 6(a)–(d). The inversion was performed for all shots in one frequency band (2–15 Hz). The inverted models contain more information about the subsurface velocity fields than the initial parameter distributions. In particular, there is a low-velocity (V_{P0}) layer at a depth of 3.1 km that likely represents the reservoir (Szydlik *et al.*, 2007).

The radiation-pattern analysis for the velocity-based parameterization demonstrates that the vertical displacement component may not be sufficiently sensitive to some TI parameters (in particular, to $V_{hor,P}$ and V_{S0} ; see Singh *et al.*, 2021). Therefore, it is not surprising that the resolution of the velocity $V_{hor,P}$ is lower than that of V_{P0} . Furthermore, the seal layer that corresponds to the high-velocity zone above the reservoir is not visible in the V_{S0} -field. Also, there are noticeable high-velocity artefacts around $z = 2.5$ km and $x > 6$ km (marked by arrows), possibly due to the trade-offs between V_{S0} , $V_{hor,P}$ and $V_{nmo,P}$ (Kamath and Tsvankin, 2016). Note that

these artefacts are not present in the tomography (initial FWI) models.

The inversion also produces a reduction in the density values around $z = 3.1$ km, the region that likely corresponds to the reservoir (Fig. 7a). However, we observe a similar decrease in density around $z = 2.35$ km that does not correlate with the inverted velocities. Hence, we assume the latter anomaly to be an artefact caused by the parameter trade-offs in the unconstrained FWI. Overall, the misfit (estimated as the least-squares error for the normalized amplitudes) is reduced by about 60% after 24 inversion iterations.

Even though the unconstrained FWI helps delineate the reservoir region (including the seal), the results suffer from the parameter crosstalk, which needs to be mitigated to improve the model reconstruction.

Facies-based FWI

To determine the impact of facies information on the quality of the inversion results, we apply the facies-based full-waveform

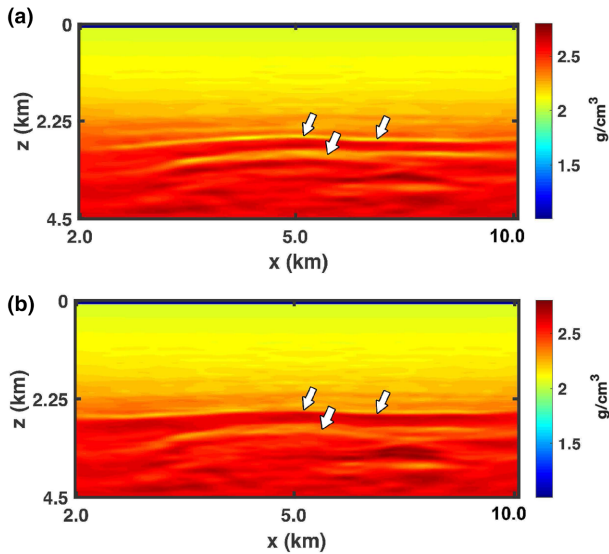


Figure 7 Density inverted using (a) the unconstrained FWI, and (b) the facies-based FWI. The arrows point to the areas of improvement achieved by the facies-based algorithm.

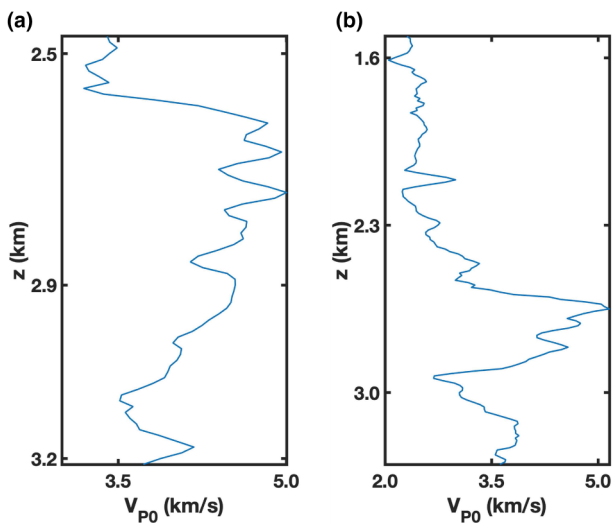


Figure 8 Upscaled sonic logs of the velocity V_{P0} for (a) well 1 ($x = 4.5$ km), and (b) well 2 ($x = 8.2$ km).

inversion (FWI) algorithm in the same frequency band. The rock-physics constraints for the inversion are computed from the well logs at two boreholes that provide measurements of V_{P0} , V_{S0} and ρ (Fig. 8). The logs are upscaled using a moving-average technique (Lindsay and Koughnet, 2001) prior to FWI to make them suitable for seismic inversion. As shown in Figure 2, the well logs cover a depth interval that

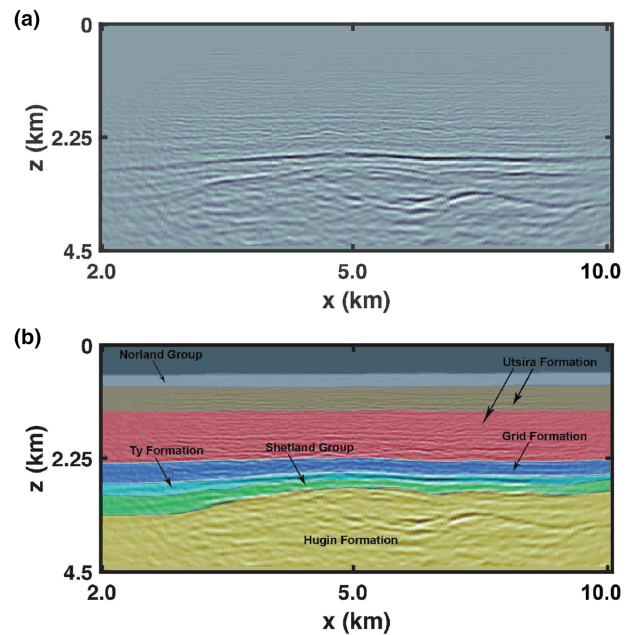


Figure 9 (a) Depth-migrated image obtained using the initial 1D models from Figures 3 and 4. (b) The facies model overlaying plot (a).

includes the reservoir. To incorporate the well logs, they are projected onto the vertical acquisition plane at spatial locations of $x = 4.2$ km and $x = 8.2$ km. Because the borehole data are provided as functions of the distance along the well, they are first calibrated to the actual depth before the projection. Although the boreholes deviate from the vertical plane that includes the acquisition line, the background symmetry-axis tilt and anisotropy coefficients in the surrounding region are relatively small. Therefore, it was not necessary to correct the well logs for the borehole deviations. Also, the medium around the boreholes is mildly heterogeneous, so we expect the projection errors to be insignificant.

Using this borehole information, we build the so-called ‘depth trend’ by assigning sonic and density log values to each facies and horizon to extract the part of the well-log data corresponding to a particular facies. To obtain the facies distribution, we first migrate the data using the imaging condition based on energy norm (Rocha *et al.*, 2017). The migrated image in Figure 9(a) is obtained by employing the one-dimensional initial TI model; the facies information provided by Equinor is overlaid on that image (Fig. 9b). The facies distribution is generally determined from cross-plots between different elastic and petrophysical properties. Several machine-learning algorithms have been proposed to generate facies distributions from seismic images in the absence of prior information (Liu *et al.*, 2020; Napoli *et al.*, 2020).

In our case study, we pick a total of eight facies, which align with the major horizons identified in the image. It may be possible to use more advanced classifications of facies and include such important physical parameters as porosity and fluid identifiers.

The next step is to employ image-guided interpolation to compute the spatial distribution of the elastic properties (Zabihi Naeini and Hale, 2015). Because there is no borehole information about the Thomsen coefficients ϵ and δ , these parameters are picked from the tomography models at the borehole locations and combined with the V_{P0} -functions from the well logs to determine $V_{\text{hor},P}$ and $V_{\text{nmo},P}$. The interval velocities $V_{\text{hor},P}$ and $V_{\text{nmo},P}$ near the boreholes can also be obtained from non-hyperbolic moveout inversion of reflection P-wave data (Tsvankin, 2012; Wang and Tsvankin, 2013).

The interpolated models ($\mathbf{m}^{\text{interp}}$) and the borehole information are used to assign the best-matched elastic property (\mathbf{m}^f) for each facies (Singh *et al.*, 2020b, 2021):

$$\mathbf{m}^f(i, j) := \min_{n=1\dots k} \{\mathbf{m}^{\text{interp}}(i, j) - \mathbf{D}_T(n)|_{\text{facies}(i, j)}\}, \quad (10)$$

where k is the total number of the parameter values in \mathbf{D}_T ('depth trends') that corresponds to a particular facies (see the spatial map in Fig. 10), and (i, j) indicate the spatial location in the staggered grid. The term 'facies(i, j)' produces an integer between 1 and N (N is the total number of facies), which identifies the facies present at the corresponding grid point. Although the accuracy of this procedure would increase if more well logs were available, even sparse prior information improves the convergence of FWI. Because well logs typically cover a limited depth range, it is beneficial to apply facies constraints in the part of the section where borehole data are available. Therefore, we use a rectangular mask (marked in Fig. 10) that covers the area where we preserve facies-based information. This mask acts as the weighting factor \mathbf{W}_m for the model-misfit term in equation (7). This factor is equal to unity inside the rectangle in Fig. 10 and decreases exponentially with distance away from that region.

The facies-based FWI reconstructs the model parameters with higher resolution (Fig. 6e–h) than the unconstrained algorithm (Fig. 6a–d). In particular, the issue with the insufficient sensitivity of the vertical-component data to $V_{\text{hor},P}$ and V_{S0} is substantially mitigated. For example, the seal layer (the high-velocity horizon above the reservoir) is properly reconstructed in the V_{S0} -field (Fig. 11). Also, the high-velocity artefacts around $z = 2.5$ km and $x > 6$ km are largely suppressed.

It should be emphasized that density, which is challenging to constrain from surface seismic data, is estimated

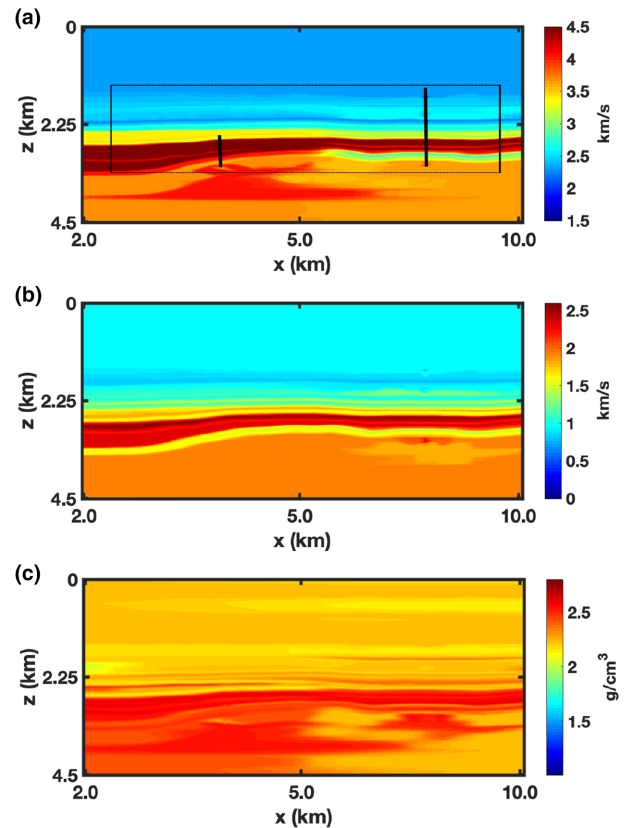


Figure 10 Image-guided interpolated models for (a) V_{P0} , (b) V_{S0} , and (c) ρ obtained using borehole data at the two locations marked by the vertical lines on plot (a). The rectangular mask on plot (a) marks the area where we employ facies-based information.

with higher resolution compared to the unconstrained FWI (Fig. 7b). For example, the horizon with a lower density at the top of the plausible reservoir around $z = 3.1$ km is better focused, and the likely artefact around $z = 2.35$ km is almost eliminated (Fig. 11).

The facies-based FWI reduces the objective function by approximately 65%, which indicates a better data fit than that achieved by the unconstrained FWI. Figure 12 compares field seismograms with those computed for the models estimated by the unconstrained and facies-based inversion. The improvements achieved by the facies-based FWI in amplitude matching are marked in red and those in phase matching are marked in yellow. Evidently, in addition to increasing parameter resolution, including the facies information reduces the misfit between the observed and simulated data. From Figures 6, 7, 11, and 12, it is clear that the employed lithologic constraints improve the quality of the inverted velocity and density fields.

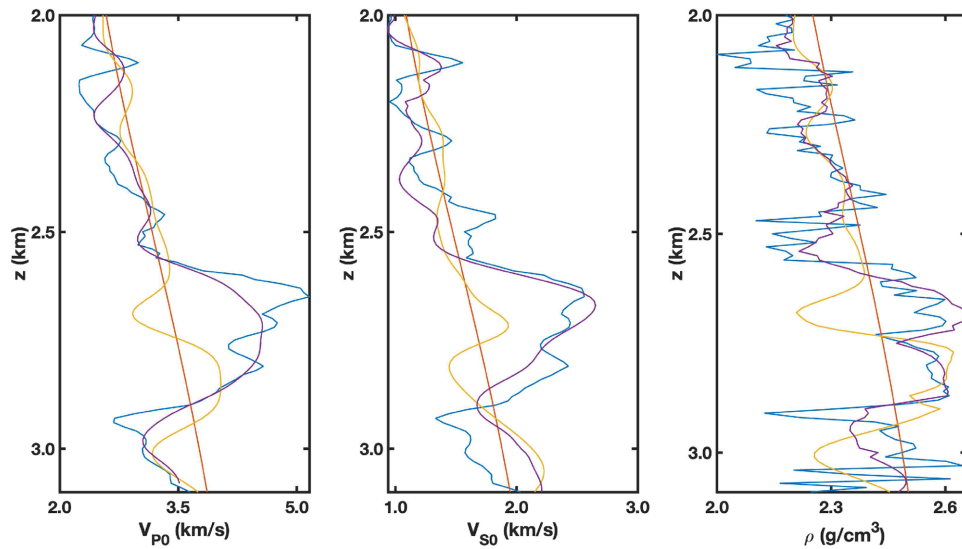


Figure 11 Vertical profiles of V_{P0} , V_{S0} and ρ at $x = 8.2$ km. The parameters obtained from the well logs are marked by the blue lines and the initial models by the red lines. The inversion results are marked by the yellow lines (unconstrained FWI) and violet lines (facies-based FWI).

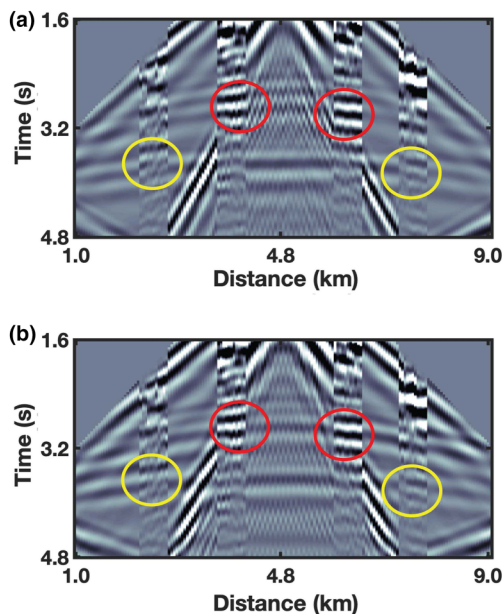


Figure 12 Quality of data matching for shot 58 at $x \approx 5$ km (vertical component). The recorded traces are interleaved between the traces simulated using the results of the (a) unconstrained FWI, and (b) facies-based FWI.

DISCUSSION

Three-dimensional ocean-bottom surveys often provide superior quality of velocity models and seismic images. Full-waveform inversion (FWI) can be efficiently applied to OBS records because it can operate with multi-component data and

properly handle reflection amplitudes. However, the signal-to-noise ratio on the horizontal components is often too low for their inclusion in FWI.

Here we inverted only the vertical component, which is not sufficiently sensitive to some of the elastic parameters, such as the shear-wave symmetry-direction velocity V_{S0} and P-wave velocity $V_{hor,P}$ for typical acquisition geometries. As a result, the unconstrained FWI is unable to adequately reconstruct V_{S0} and $V_{hor,P}$, which is also confirmed by the synthetic tests performed by Singh *et al.* (2020b). It should be mentioned, however, that simultaneous inversion of the vertical and horizontal components tends to make the objective function more multi-modal, which hinders the model-updating procedure (Kamath and Tsvankin, 2016).

The proposed approach that incorporates prior facies information improves the inversion results and increases the parameter resolution in the reservoir region. Borehole data (usually well logs) serve as the primary source of geologic information about the subsurface. The sparseness of the borehole measurements and insufficient information about the reservoir formation in this case study necessitates application of image-guided interpolation with proper spatial weighting.

The facies distribution is generally determined from the correlations between different elastic and petrophysical properties at the borehole locations. In our study, we pick a total of eight facies based on the major horizons in the migrated image and on the available well tops. A more advanced facies classification could include such properties as porosity, shale

volume, and saturation. Although several machine-learning models have been proposed to generate the facies distribution from seismic images (Liu *et al.*, 2020), a model trained on a certain seismic section often becomes inadequate for different geologic settings.

Previous studies that employ reflection tomography show that a tilted TI model provides high-quality images at Volve field (Wang and Tsvankin, 2013). Therefore, we honour the symmetry-axis tilt in the modelling algorithm and continuously update it during the inversion using the imaged structural dips. (Although the orientation of the symmetry axis is not estimated by FWI, it should be beneficial for resolving the other medium parameters to take the symmetry-axis tilt into account.) In this case study, however, the tilt is relatively mild, and its influence on the FWI results is modest.

Zhang and Alkhalifah (2020) show that their facies-based FWI algorithm applied to the same line from a different survey produces the VTI parameters in the reservoir region with higher resolution compared to the unconstrained inversion. Our facies-based FWI methodology for TTI media further increases the resolution for all parameter fields both inside and outside the reservoir. Finally, our algorithm estimates density, which is highly beneficial for both velocity inversion and reservoir characterization.

CONCLUSIONS

We applied a modified version of a previously developed facies-based full-waveform inversion (FWI) algorithm for anisotropic media to ocean-bottom data from the North Sea. The facies-based constraints obtained from two boreholes mitigate the parameter trade-offs and increase the resolution of the inverted parameters of tilted transversely isotropic media, especially in the reservoir region. The spatial distribution of the facies is built by image-guided interpolation along the major horizons in the depth-migrated image. Then the constraints are imposed at each grid point to find the best-matched elastic properties for a given facies. Whereas the facies-based FWI provides better estimates of all medium parameters compared to the unconstrained inversion, the increase in resolution is especially significant for the P-wave velocity in the isotropy plane ($V_{\text{hor},P}$) and the S-wave symmetry-direction velocity (V_{S0}). These improvements are achieved without low-frequency data (0–2 Hz), which are seldom available in field surveys. Our algorithm also produces a well-resolved density model, which is a challenging task for FWI of surface reflection data. This case study demonstrates

the effectiveness of properly employed geologic constraints in elastic FWI for anisotropic media.

ACKNOWLEDGEMENTS

This work was supported by the Consortium Project on Seismic Inverse Methods for Complex Structures at the Center for Wave Phenomena (CWP). We thank Yogesh Arora (CGG) for his help with Java libraries for 2D image-guided interpolation. We are grateful to Jim Simmons (CSM) and the members of the A(anisotropy)-Team at CWP for useful discussions. We are also thankful to Statoil (Equinor) and the Volve license partners ExxonMobil, E&P Norway, and Bayerngas Norge for the release of the Volve data. The viewpoints about the Volve data set in this paper are of the authors and do not necessarily reflect the views of Equinor and the Volve field license partners.

DATA AVAILABILITY STATEMENT

Data associated with this research are available and can be accessed via the following URL: data.equinor.com.

ORCID

Sagar Singh  <https://orcid.org/0000-0003-3877-176X>

REFERENCES

- Alkhalifah, T. (2016) *Full waveform inversion in an anisotropic world: where are the parameters hiding?*. EAGE Publications.
- Alkhalifah, T. & Plessix, R.E. (2014) A recipe for practical fullwaveform inversion in anisotropic media: an analytical parameter resolution study. *Geophysics*, 79(3), R91–R101.
- Asnaashari, A., Brossier, R., Garambois, S., Audebert, F., Thore, P. & Virieux, J. (2013) Regularized seismic full waveform inversion with priormodel information. *Geophysics*, 78(2), R25–R36.
- Audebert, F., Dirks, V. & Pettenati, A. (2006) TTI Anisotropic Depth Migration: what tilt estimate should we use? SEG 76th Annual International Meeting, pp. 2382–2386.
- Behera, L. (2017) Elastic anisotropic finite-difference full-wave modeling and imaging of the tilted transversely isotropic (TTI) media. *SEG 87th Annual International Meeting*, pp. 299–304.
- Bohlen, T. (2002) Parallel 3-D viscoelastic finite-difference seismic modelling. *Computers & Geosciences*, 28, 887–899.
- Brossier, R., Operto, S. & Virieux, J. (2009) Seismic imaging of complex onshore structures by 2D elastic frequency-domain full-waveform inversion. *Geophysics*, 74(6), WCC105–WCC118.
- Dutta, G., Sinha, M. & Schuster, G.T. (2014) A crosscorrelation objective function for least-squares migration and visco-acoustic imaging. *SEG 84th Annual International Meeting*, pp. 3985–3990.

- Choi, Y. & Alkhalifah, T. (2012) Application of multi-source waveform inversion to marine streamer data using the global correlation norm. *Geophysical Prospecting*, 60(4), 748–758.
- Guitton, A., Ayeni, G. & Daz, E. (2012) Constrained full-waveform inversion by model reparameterization. *Geophysics*, 77(2), R117–R127.
- Guitton, A. & Alkhalifah, T. (2017) A parameterization study for elastic VTI full waveform inversion of hydrophone components: synthetic and North Sea field data examples. *Geophysics*, 82(6), R299–R308.
- Hager, W. W. & Zhang, H. (2006) A survey of nonlinear conjugate gradient methods. *Pacific Journal of Optimization*, 6, 35–58.
- Jarillo Michel, O. & Tsvankin, I. (2017) Waveform inversion for microseismic velocity analysis and event location in VTI media. *Geophysics*, 82(4), WA95–WA103.
- Kamath, N. & Tsvankin, I. (2016) Elastic full-waveform inversion for VTI media: methodology and sensitivity analysis. *Geophysics*, 81(2), C53–C68.
- Kazei, V. & Alkhalifah, T. (2019) Scattering radiation pattern atlas: what properties cannot be resolved by anisotropic elastic full-waveform inversion? *Journal of Geophysical Research*, 124(3), 2781–2811.
- Li, Y., Alkhalifah, T. & Zhang, Z. (2021) Deep-learning assisted regularized elastic full waveform inversion using velocity distribution information from wells. *Geophysical Journal International*, 226, 1322–1335.
- Li, F., Zhou, H., Wang, Z. & Wu, X. (2021) ADDCNN: an attention-based deep dilated convolutional neural network for seismic facies analysis with interpretable spatial–spectral maps. *IEEE Transactions on Geoscience and Remote Sensing*, 59(2), 1733–1744.
- Li, J., Pan, W. & Innanen, K. (2017) Gradient calculation for anisotropic FWI. *Geoconvention*, 1–5.
- Lindsay, R. & Koughnet, R.V. (2001) Sequential backus averaging: upscaling well logs to seismic wavelengths. *The Leading Edge*, 20(2), 188–191.
- Liu, M., Jervis, M., Li, W. & Nivlet, P. (2020) Seismic facies classification using supervised convolutional neural networks and semisupervised generative adversarial networks. *Geophysics*, 85(4), O47–O58.
- Martin, G., Wiley, R. & Marfurt, K.J. (2006) Marmousi2: an elastic upgrade for Marmousi. *The Leading Edge*, 25, 156–166.
- Napoli, O.O., Martins do Rosario, V., Navarro, J.P., Silva, P.M.C. & Borin, E. (2020) Accelerating multi-attribute unsupervised seismic facies analysis with RAPIDS. Preprint, arXiv:2007.15152.
- Oh, J.W., Shin, Y., Alkhalifah, T. & Min, D.J. (2020) Multistage elastic full-waveform inversion for tilted transverse isotropic media. *Geophysical Journal International*, 223(1), 57–76.
- Plessix, R.-E. & Mulder, W. A. (2004) Frequency-domain finite-difference amplitude-preserving migration. *Geophysical Journal International*, 157, 975–987.
- Pratt, R.G. & Smithyman, B. (2018) Full waveform inversion for density: reciprocity, divergence, parameter resolution, and other issues. 80th EAGE Conference and Exhibition. pp. 1–5.
- Qu, Y., Li, Z. & Huang, J. (2017) Elastic full-waveform inversion for surface topography. *Geophysics*, 82(5), R269–R285.
- Rocha, D., Tanushev, N. & Sava, P. (2017) Anisotropic elastic wavefield imaging using the energy norm. *Geophysics*, 82(3), S225–S234.
- Shipp, R.M. & Singh, S.C. (2002) Two-dimensional full wavefield inversion of wide-aperture marine seismic streamer data. *Geophysical Journal International*, 151(2), 325–344.
- Singh, S., Tsvankin, I. & Zabihi Naeini, E. (2018) Bayesian framework for elastic full-waveform inversion with facies information. *The Leading Edge*, 37(12), 924–931.
- Singh, S., Tsvankin, I. & Zabihi Naeini, E. (2020a) Elastic full-waveform inversion with geologic information for tilted TI media. *EAGE 82nd Annual Conference and Exhibition*, pp. 1–5.
- Singh, S., Tsvankin, I. & Zabihi Naeini, E. (2020b) Full-waveform inversion for elastic VTI media with borehole constraints. *Geophysics*, 85(6), R553–R563.
- Singh, S., Tsvankin, I. & Zabihi Naeini, E. (2021) Elastic FWI for orthorhombic media with lithologic constraints applied via machine learning. *Geophysics*, 86(4), R589–R602.
- Singh, S. & Tsvankin, I. (2020) Sensitivity analysis of FWI for elastic orthorhombic media. SEG 88th Annual International meeting, pp. 171–175.
- Szydluk, T., Smith, P., Way, S., Aamodt, L. & Friedrich, C. (2007) 3D PP/PS prestack depth migration on the Volve field. *First Break*, 25(4), 43–47.
- Tarantola, A. (1984) Inversion of seismic reflection data in the acoustic approximation. *Geophysics*, 49(8), 1259–1266.
- Tsvankin, I. & Grechka, V. (2011) *Seismology of azimuthally anisotropic media and seismic fracture characterization*. Tulsa, OK: Society of Exploration Geophysicists.
- Tsvankin, I. (2012) *Seismic signatures and analysis of reflection data in anisotropic media*, 3rd edition. Tulsa, OK: Society of Exploration Geophysicists.
- Wang, X. & Tsvankin, I. (2013) Multiparameter TTI tomography of P-wave reflection and VSP data. *Geophysics*, 78(5), WC51–WC63.
- Zabihi Naeini, E. & Hale, D. (2015) Image- and horizon-guided interpolation. *Geophysics*, 80(3), V47–V56.
- Zhang, Z. & Alkhalifah, T. (2019) Regularized elastic full-waveform inversion using deep learning. *Geophysics*, 84(5), R741–R751.
- Zhang, Z. and Alkhalifah, T. (2020) High-resolution reservoir characterization using deep learning-aided elastic full-waveform inversion. *The North Sea field data example*, *Geophysics*, 85(4), WA137–WA146.
- Zhang, Z., Alkhalifah, T., Zabihi Naeini, E. & Sun, B. (2018) Multiparameter elastic full waveform inversion with facies-based constraints. *Geophysical Journal International*, 213(3), 2112–2127.

APPENDIX A: STIFFNESS COEFFICIENTS FOR 2D TTI MEDIA

We consider wave propagation in the vertical symmetry plane of a TTI (transversely isotropic with a tilted symmetry axis) medium that contains the symmetry axis. The signatures of P- and SV-waves in that plane are controlled by the P- and

S-wave symmetry-direction velocities (V_{P0} and V_{S0}), the P-wave velocity in the isotropy plane ($V_{\text{hor},P} = V_{P0}\sqrt{1+2\epsilon}$), the velocity $V_{\text{nmo},P} = V_{P0}\sqrt{1+2\delta}$, the tilt θ of the symmetry axis with respect to the vertical, and the density (ρ).

The stiffness coefficients in the coordinate system for which the symmetry axis points in the z -direction (i.e. VTI) can be expressed through the velocities and density as follows:

$$c_{11} = \rho V_{\text{hor},P}^2, \quad (\text{A1})$$

$$c_{13} = \rho \left\{ \sqrt{[V_{P0}^2 - V_{S0}^2][V_{\text{nmo}}^2 - V_{S0}^2]} - V_{S0}^2 \right\}, \quad (\text{A2})$$

$$c_{33} = \rho V_{P0}^2, \quad (\text{A3})$$

$$c_{44} = \rho V_{S0}^2. \quad (\text{A4})$$

The two-dimensional equation of motion for P- and SV-waves (equation 2) can be written in the vertical symmetry plane of TTI media as:

$$\begin{aligned} \rho \frac{\partial v_x}{\partial t} &= \frac{\partial \sigma_{xx}}{\partial x} + \frac{\partial \sigma_{xz}}{\partial z} + f_x, \\ \rho \frac{\partial v_z}{\partial t} &= \frac{\partial \sigma_{zz}}{\partial z} + \frac{\partial \sigma_{xz}}{\partial x} + f_z, \\ \frac{\partial \sigma_{xx}}{\partial t} &= d_{11} \frac{\partial v_x}{\partial x} + d_{13} \frac{\partial v_z}{\partial z} + d_{15} \left(\frac{\partial v_x}{\partial z} + \frac{\partial v_z}{\partial x} \right), \\ \frac{\partial \sigma_{zz}}{\partial t} &= d_{13} \frac{\partial v_x}{\partial x} + d_{33} \frac{\partial v_z}{\partial z} + d_{35} \left(\frac{\partial v_x}{\partial z} + \frac{\partial v_z}{\partial x} \right), \\ \frac{\partial \sigma_{xz}}{\partial t} &= d_{15} \frac{\partial v_x}{\partial x} + d_{35} \frac{\partial v_z}{\partial z} + d_{55} \left(\frac{\partial v_x}{\partial z} + \frac{\partial v_z}{\partial x} \right), \end{aligned} \quad (\text{A5})$$

where \mathbf{v} is the particle velocity and d_{ijkl} is the stiffness tensor. To express the stiffnesses d_{ijkl} through those for the corresponding VTI medium, the axis z has to be rotated by the angle θ . In the two-index (Voigt) notation, the pertinent stiffnesses d_{ij} are (e.g. Behera, 2017):

$$d_{11} = (c_{11} \cos^2 \theta + c_{13} \sin^2 \theta) \cos^2 \theta + (c_{13} \cos^2 \theta + c_{33} \sin^2 \theta) \sin^2 \theta + 4c_{44} \cos^2 \theta \sin^2 \theta, \quad (\text{A6})$$

$$d_{13} = c_{11} \cos^2 \theta \sin^2 \theta + c_{13} (\sin^4 \theta + \cos^4 \theta) + c_{33} \cos^2 \theta \sin^2 \theta - 4c_{44} \cos^2 \theta \sin^2 \theta, \quad (\text{A7})$$

$$d_{15} = (c_{13} - c_{11}) \cos^3 \theta \sin \theta + (c_{33} - c_{13}) \cos \theta \sin^3 \theta + 2c_{44} \cos \theta \sin \theta (\cos^2 \theta - \sin^2 \theta), \quad (\text{A8})$$

$$d_{33} = (c_{11} \sin^2 \theta + c_{13} \cos^2 \theta) \sin^2 \theta + (c_{33} \cos^2 \theta + c_{13} \sin^2 \theta) \cos^2 \theta + 4c_{44} \cos^2 \theta \sin^2 \theta, \quad (\text{A9})$$

$$d_{35} = (c_{13} - c_{11}) \cos \theta \sin^3 \theta + (c_{33} - c_{13}) \cos^3 \theta \sin \theta - 2c_{44} \cos \theta \sin \theta (\cos^2 \theta - \sin^2 \theta), \quad (\text{A10})$$

$$d_{55} = c_{44} (1 - 2 \sin^2 \theta)^2 + (c_{33} - c_{13}) \sin^2 \theta \cos^2 \theta - (c_{13} - c_{11}) \sin^2 \theta \cos^2 \theta. \quad (\text{A11})$$

APPENDIX B: FWI GRADIENTS FOR 2D TTI MEDIA

The gradient of the objective function (equation 1) for arbitrarily anisotropic media is given by (e.g. Li *et al.*, 2017):

$$\frac{\partial E_d}{\partial m_n} = - \sum_{ijkl} \frac{\partial d_{ijkl}}{\partial m_n} \left(\int_0^T \frac{\partial u_i}{\partial x_j} \frac{\partial q_k}{\partial x_l} \right), \quad (\text{B1})$$

where in two-dimensional (2D) the indices $i, j, k, l = 1, 2$, T is the total time of wave propagation, \mathbf{u} and \mathbf{q} are the forward- and back-propagated displacement fields, respectively, and the vector \mathbf{m} includes the model parameters (in our case, $m_1 = V_{P0}$, $m_2 = V_{S0}$, $m_3 = V_{\text{hor},P}$, $m_4 = V_{\text{nmo},P}$ and $m_5 = \rho$).

Kamath and Tsvankin (2016) derive essentially the same expression (equation B1) for VTI media using the l^2 -norm objective function. The only difference is that here the back-propagated wavefield \mathbf{q} is derived using equation (1); also, we employ the stiffness tensor d_{ijkl} for TTI media.

The derivatives of the objective function (equation B1) with respect to the TTI parameters are:

$$\begin{aligned} \frac{\partial E_d}{\partial V_{P0}} &= -\rho V_{P0} \int_0^T \left\{ \frac{\partial q_x}{\partial x} \frac{\partial u_x}{\partial x} d_{11, V_{P0}} \right. \\ &\quad + \left(\frac{\partial q_x}{\partial x} \frac{\partial u_x}{\partial x} + \frac{\partial q_z}{\partial z} \frac{\partial u_z}{\partial z} \right) d_{13, V_{P0}} \\ &\quad + \left[\frac{\partial q_x}{\partial x} \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \frac{\partial u_x}{\partial x} \right] d_{15, V_{P0}} \\ &\quad + \frac{\partial q_z}{\partial z} \frac{\partial u_z}{\partial z} d_{33, V_{P0}} \\ &\quad + \left[\frac{\partial q_z}{\partial z} \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \frac{\partial u_x}{\partial z} \right] d_{35, V_{P0}} \\ &\quad \left. + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) d_{55, V_{P0}} \right\} dt, \quad (\text{B2}) \\ \frac{\partial E_d}{\partial V_{S0}} &= -\rho V_{S0} \int_0^T \left\{ \frac{\partial q_x}{\partial x} \frac{\partial u_x}{\partial x} d_{11, V_{S0}} \right. \\ &\quad + \left(\frac{\partial q_x}{\partial x} \frac{\partial u_x}{\partial x} + \frac{\partial q_z}{\partial z} \frac{\partial u_z}{\partial z} \right) d_{13, V_{S0}} \\ &\quad + \left[\frac{\partial q_x}{\partial x} \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \frac{\partial u_x}{\partial x} \right] d_{15, V_{S0}} \\ &\quad \left. + \frac{\partial q_z}{\partial z} \frac{\partial u_z}{\partial z} d_{33, V_{S0}} \right\} dt \end{aligned}$$

$$\begin{aligned}
& + \left[\frac{\partial q_z}{\partial z} \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \frac{\partial u_z}{\partial z} \right] d_{35, V_{S0}} \\
& + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) d_{55, V_{S0}} \Big\} dt, \quad (B3)
\end{aligned}$$

$$\begin{aligned}
\frac{\partial E_d}{\partial V_{\text{hor}, P}} &= -\rho V_{\text{hor}, P} \int_0^T \left\{ \frac{\partial q_x}{\partial x} \frac{\partial u_x}{\partial x} d_{11, V_{\text{hor}, P}} \right. \\
& + \left(\frac{\partial q_x}{\partial x} \frac{\partial u_x}{\partial x} + \frac{\partial q_z}{\partial z} \frac{\partial u_z}{\partial z} \right) d_{13, V_{\text{hor}, P}} \\
& + \left[\frac{\partial q_x}{\partial x} \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \frac{\partial u_x}{\partial x} \right] d_{15, V_{\text{hor}, P}} \\
& + \frac{\partial q_z}{\partial z} \frac{\partial u_z}{\partial z} d_{33, V_{\text{hor}, P}} \\
& + \left[\frac{\partial q_z}{\partial z} \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \frac{\partial u_z}{\partial z} \right] d_{35, V_{\text{hor}, P}} \\
& \left. + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) d_{55, V_{\text{hor}, P}} \right\} dt, \quad (B4)
\end{aligned}$$

$$\begin{aligned}
\frac{\partial E_d}{\partial V_{\text{nmo}, P}} &= -\rho V_{\text{nmo}, P} \int_0^T \left\{ \frac{\partial q_x}{\partial x} \frac{\partial u_x}{\partial x} d_{11, V_{\text{nmo}, P}} \right. \\
& + \left(\frac{\partial q_x}{\partial x} \frac{\partial u_x}{\partial x} + \frac{\partial q_z}{\partial z} \frac{\partial u_z}{\partial z} \right) d_{13, V_{\text{nmo}, P}} \\
& + \left[\frac{\partial q_x}{\partial x} \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \frac{\partial u_x}{\partial x} \right] d_{15, V_{\text{nmo}, P}} \\
& + \frac{\partial q_z}{\partial z} \frac{\partial u_z}{\partial z} d_{33, V_{\text{nmo}, P}} \\
& + \left[\frac{\partial q_z}{\partial z} \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \frac{\partial u_z}{\partial z} \right] d_{35, V_{\text{nmo}, P}} \\
& \left. + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) d_{55, V_{\text{nmo}, P}} \right\} dt. \quad (B5)
\end{aligned}$$

The gradient for density can be obtained by applying the chain rule to equation (B1):

$$\begin{aligned}
\frac{\partial E_d}{\partial \rho} &= - \int_0^T \left\{ \frac{\partial q_x}{\partial x} \frac{\partial u_x}{\partial x} d_{11, \rho} \right. \\
& + \left(\frac{\partial q_x}{\partial x} \frac{\partial u_x}{\partial x} + \frac{\partial q_z}{\partial z} \frac{\partial u_z}{\partial z} \right) d_{13, \rho} \\
& + \left[\frac{\partial q_x}{\partial x} \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \frac{\partial u_x}{\partial x} \right] d_{15, \rho} \\
& + \frac{\partial q_z}{\partial z} \frac{\partial u_z}{\partial z} d_{33, \rho} \\
& + \left[\frac{\partial q_z}{\partial z} \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \frac{\partial u_z}{\partial z} \right] d_{35, \rho} \\
& + \left(\frac{\partial q_x}{\partial z} + \frac{\partial q_z}{\partial x} \right) \left(\frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} \right) d_{55, \rho} \\
& \left. + v_x q_x + v_z q_z \right\} dt. \quad (B6)
\end{aligned}$$

Here v and q are the forward- and back-propagated particle-velocity fields, respectively. In equations (B2–B6), $d_{ijkl, m}$ is the derivative of d_{ijkl} (equations A6–A11) with respect to the model parameter m . For example, $d_{11, V_{P0}}$ is given by

$$d_{11, V_{P0}} = \frac{\partial d_{11}}{\partial V_{P0}} = \rho V_{P0} \{2 \sin^2 \theta (q \cos^2 \theta + 2 \sin^2 \theta)\}, \quad (B7)$$

where

$$q = \sqrt{\frac{V_{\text{nmo}, P}^2 - V_{S0}^2}{V_{P0}^2 - V_{S0}^2}}. \quad (B8)$$